jc598 U.S. PTO
05/06/99

OSTROLENK, FABER, GERB & SOFFEN, LLP
Attorneys at Law
1180 Avenue of the Americas
New York, New York 10036-8403
---
(212) 382-0700

Telex
23 6925

Facsimile
(212) 382-0888

Cable
Ostrofaber NewYork

PTO
09/306110
05/06/99

Express Mail #EL010253857US

Asst. Commissioner of Patents and Trademarks
Washington, DC 20231

OFGS File No. : P/2850-19
Inventor : Satoshi HASEGAWA
Title : DATA TRANSMISSION SYSTEM FOR PREVENTION OF UNAUTHORIZED COPY OF DATA FROM RECORDING MEDIUM
Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

17 Pages of Specification including Abstract and Claims
14 Numbered Claims Calculated as 14 Claims for Fee Purposes
6 Sheets of Drawing Containing Figures 1 to 6.
X Declaration and Power of Attorney
X Priority is Claimed under 35 U.S.C. §119:
Convention Date May 11, 1998 for Japan Appln. S.N. 10-127907
X Certified Priority Application
X PTO-1449 with 2 references
X Preliminary Amendment
X Assignment
X Return-Addressed Post Card
OFGS Check No. 84387, which includes the fee of $800.00, calculated as follows:

Basic Filing Fee:	$ 760.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times $18:	
Number of Independent Claims in Excess of 3, times $78: . .	
One or More Multiple Dependent Claims: Total $260.	
Total Filing Fees or	760.00
Total Filing Fee Reduced 50% for Small Entity:	
Assignment Recording Fee: $40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	$ 800.00

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL010253857US) in an envelope addressed to: Asst. Commissioner of Patents and Trademarks, Washington, D.C. 20231, on May 6, 1999:

Dorothy Jenkins
Name of Person Mailing Correspondence

Dorothy Jenkins
Signature

May 6, 1999
Date of Signature

Respectfully submitted,

Steven I. Weisburd
Registration No.: 27,409
OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

P/2850-19

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of
Satoshi HASEGAWA
Serial No.:
Filed:

New York, New York
Date: May 6, 1999
Group Art Unit:
Examiner:

For: DATA TRANSMISSION SYSTEM FOR PREVENTION OF UNAUTHORIZED COPY OF DATA FROM RECORDING MEDIUM

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to examination, please amend the application as follows:

IN THE CLAIMS:

Please amend claims 3, 4 and 7 as follows.

Claim 3, line 1, delete "or 2".

Claim 4, line 1, change "any one of claims 1 to 3" to --claim 1--.

Claim 7, line 1, change "5 or 6" to --claim 5--.

Please add the following new claims 10-14.

--10. A data transmission system according to claim 2 wherein the variable do not remain the same so that the variable is changed at an arbitrary timing.

11. A data transmission system according to claim 2 wherein a variable change code representing a message that the variable is changed is produced by the calculation using the variable and is temporarily stored in the stream buffer together with the calculated data stream.

12. A data transmission system according to claim 3 wherein a variable change code representing a message that the variable is changed is produced by the calculation using the variable and is temporarily stored in the stream buffer together with the calculated data stream.

13. A data transmission system according to claim 10 wherein a variable change code representing a message that the variable is changed is produced by the calculation using the variable and is temporarily stored in the stream buffer together with the calculated data stream.

14. A data transmission system according to claim 6 wherein a variable change code representing a message that the variable is changed is produced by the calculation using the variable and is temporarily stored in the stream buffer together with the calculated data stream.--

REMARKS

This Preliminary Amendment is submitted to change the multiple dependent claims to single dependent claims in order to eliminate the improper multiple dependent claims and to reduce the government filing fee.

EXPRESS MAIL CERTIFICATE

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label # EL010253857US) in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on May 6, 1999:

Dorothy Jenkins
Name of Person Mailing Correspondence

Dorothy Jenkins
Signature

May 6, 1999
Date of Signature

Respectfully submitted,

Steven I. Weisburd
Registration No.: 27,409
OSTROLENK, FABER, GERB & SOFFEN
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

DATA TRANSMISSION SYSTEM FOR PREVENTION OF UNAUTHORIZED COPY OF DATA FROM RECORDING MEDIUM

BACKGROUND OF THE INVENTION

Field of the Invention

This invention generally relates to data transmission systems which use intermediate buffer memories to transmit data from recording media. Particularly, this invention relates to the data transmission systems provided for prevention of unauthorized copy of the data of the recording media which are captured from stored contents of the intermediate buffer memories.

This application is based on Patent Application No. Hei 10-127907 filed in Japan, the content of which is incorporated herein by reference.

Description of the Related Art

There are provided a variety of methods and apparatuses for prevention of digital copying of data, as follows:

The paper of Japanese Patent Application, Publication No. Hei 6-105032 discloses an example of an image forming device managing system, wherein download of image data to a copying machine is temporarily stopped until completion of copying while received image data are temporarily stored in a buffer memory so that they are transferred to a main memory after completion in reception of the image data. Thus, it is possible to perform download of the data to the copying machine with a short period of time in communications, while it is possible to prevent abnormal copying which occur when a copy is started before transfer of the

image data is completed.

The paper of Japanese Patent Application, Publication No. Hei 8-237596 discloses an example of a method and apparatus for copy prevention in a digital magnetic recording/reproduction system, wherein a copy authorization is detected using a marker which is formed by a control word for scrambling audio and video bit streams and copy protection (CP) information used for prevention of unauthorized copy and which is subjected to encryption using a cipher key and is recorded on a video tape, for example. Herein, the control word is reproduced from the marker and is subjected to descrambler to enable display on a monitor.

Conventionally, some of the data transmission systems or data communication systems normally use intermediate buffer memories to transmit data from one location to another. However, such data transmission system is not always capable of processing all data streams stored in the intermediate buffer memory at a time. Particularly, in the case of the software processing, the system captures a limited amount of data, which can be processed at one time, among all of the data accumulated in the intermediate buffer memory. So, the system processes limited amounts of data successively.

FIG. 6 is a block diagram showing an example of the conventional data transmission system in which data stream processing is performed by means of an intermediate buffer memory.

In FIG. 6, data streams are read from a recording medium (or recording media) 1 and are temporarily stored in a stream buffer 2 to an extent that they will not overflow. Then, a stream processing unit 3

accesses the stream buffer 2 to capture an amount of the data stream(s), which can be processed at one time. So, the stream processing unit 3 processes amounts of the data streams successively.

Thereafter, processing results of the data streams are output to an output unit 4, which in turn provides corresponding outputs to the external device or system (not shown).

In the aforementioned system, it is possible to easily capture the stored content of the intermediate buffer memory (i.e., stream buffer 2) by the known techniques such as the memory snapshot. So, it is possible to make a duplication with ease. However, this raises a problem in protection of the copy right. So, it is strongly demanded to provide a solution in the protection of the copy right with respect to the data transmission system which uses the intermediate buffer memory for transmission (or communication) of data from the recording medium.

SUMMARY OF THE INVENTION

It is an object of the invention to provide a data transmission system that is capable of preventing unprocessed data streams of a recording medium from being captured from an intermediate buffer memory so that an unauthorized copy will not be made with ease.

This invention provides a data transmission system which is basically designed to transmit data streams recorded on recording media to the external system or device. Herein, an original data stream read from a recording medium is subjected to calculation using a variable selected from a variable set which consists of a number of variables and which is created

by each cycle. In addition, a variable change code is provided to represent the variable selected from the variable set. The calculated data stream is temporarily stored on an intermediate buffer memory together with the variable change code. Then, the calculated data stream is output from the intermediate buffer memory and is subjected to inverse calculation using the same variable designated by the variable change code. Using the inverse calculation, it is possible to reproduce the data stream, which is then processed. Thereafter, the data transmission system outputs the processed data stream.

Because the calculated data stream is stored on the intermediate buffer memory, it is difficult for the third party to easily capture the original data stream from the intermediate buffer memory. In addition, the variable used for the calculation and inverse calculation is changed in each cycle, so that it is difficult for the third party to decode the calculated data stream to the original data stream. Therefore, it is possible to prevent the third party to easily produce an unauthorized copy of the original data stream recorded on the recording medium from the stored content of the intermediate buffer memory.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, aspects and embodiment of the present invention will be described in more detail with reference to the following drawing figures, of which:

FIG. 1 is a block diagram showing a configuration of a data transmission system in accordance with an embodiment of the invention;

FIG. 2 is a flowchart showing procedures for creation of variables;

FIG. 3 is a flowchart showing procedures for calculations of data streams using the variables;

FIG. 4 is a flowchart showing procedures for inverse calculations to reproduce original data streams;

FIG. 5 is a block diagram showing a modified example of the data transmission system; and

FIG. 6 is a block diagram showing a configuration of the conventional data transmission system.

DESCRIPTION OF THE PREFERRED EMBODIMENT

This invention will be described in further detail by way of examples with reference to the accompanying drawings.

FIG. 1 is a block diagram showing a configuration of a data transmission system in accordance with an embodiment of the invention. In FIG. 1, data streams are read from a recording medium 1 and are then subjected to calculations in a calculation unit 5. Then, results of the calculations are stored in a stream buffer 2.

The calculation unit 5 requires variables for performing the calculations on the data streams. Such variations are produced by a variation creation unit 7.

The variation creation unit 7 is capable of arbitrarily changing the variables. The stream buffer 2 stores "calculated" data streams which are produced by the calculation unit 5 that performs the calculations on the "original" data streams read from the recording medium 1. An inverse

calculation unit 6 reproduces the data streams based on the calculated data streams. Then, a stream processing unit 3 performs data processing on the data streams output from the inverse calculation unit 6. Incidentally, the inverse calculation unit 6 uses the same variables which is created by the variation creation unit 7.

Next, a description will be given in detail with respect to operations of the data transmission system of FIG. 1 with reference to the block diagram of FIG. 1 as well as flowcharts of Figures 2, 3 and 4.

The block diagram of FIG. 1 shows functional blocks which are used to perform operational processes (e.g., calculations) on the data streams read from the recording medium 1. As described above, the data streams read from the recording medium 1 are subjected to the calculations in the calculation unit 5, which produces the calculated data streams. Then, the calculated data streams are temporarily stored in the stream buffer 2.

The calculation unit 5 performs the calculations on the data streams by using the variables which are created by the variable creation unit 7.

Now, procedures for creation of the variables in the variable creation unit 7 will be described with reference to the flowchart of FIG. 2. When receiving a variable creation request, the variable creation unit 7 creates a number of variables in step A1. All of the variables are sent to the calculation unit 5 and the inverse calculation unit 6 respectively in step A2.

Incidentally, such a number of variables which are created by the variable creation unit 7 at a time will be referred to as a set of variables (or variable set). The variables used for the calculations and inverse calculations are changed at the arbitrary timing(s), so the same variables

may not be used again for the calculations and inverse calculations.

Next, a description will be given with respect to the calculations that the calculation unit 5 performs on the data streams by using the variables created by the variable creation unit 7 with reference to the flowchart of FIG. 3. As described above, the calculation unit 5 receives a number of the variables from the variable creation unit 7 while using a certain variable for the calculation. Herein, the calculation unit 5 makes a decision as to whether the variables presently received differ from the variable presently used for the calculation or not in step B1. If the presently received variables differ from the presently used variable, the calculation unit 5 changes the variable. If not, in other words, if the presently received variables coincide with the presently used variable, the calculation unit 5 continues to use the presently used variable for the calculation.

When changing the variable, the calculation unit 5 arbitrarily selects a variable to be used at this timing from a "new" variable set which is sent thereto from the variable creation unit 7 in step B2. Herein, the calculation unit 5 writes a variable change code into the stream buffer 2 so as to inform the inverse calculation unit 6 of a change event that the variable is changed and information representing a number of the selected variable within the variables of the new variable set given from the variable creation unit 7.

Incidentally, the calculation unit 5 writes the variable change code into the stream buffer 2 after completing the calculation thereof using the "present" variable. If the system as a whole is placed in an initial state,

the calculation unit 5 writes an initial state code into the stream buffer 2. Then, the calculation unit 5 performs calculation using an initial variable to produce a variable change code, which is written into the stream buffer 2.

Thereafter, the calculation unit 5 changes the variable thereof in step B4.

As described above, a certain variable is established for the calculation in the next cycle. Then, the calculation unit 5 performs calculation using such an established variable on the data stream in step B5. Thereafter, the "calculated" data stream is written into the stream buffer 2 in step B6.

Next, a description will be given with respect to the inverse calculations by which the inverse calculation unit 6 reproduces the data stream based on the calculated data stream read from the stream buffer 2 with reference to the flowchart of FIG. 4.

At first, the inverse calculation unit 6 proceeds to step C1 shown in FIG. 4. If the system is placed in an initial state, the initial state code is written into the stream buffer 2. Therefore, if the inverse calculation unit 6 captures the initial state code from the stream buffer 2, it determines that the system is in the initial state. In contrast, if the inverse calculation unit 6 does not detect the initial state code, it determines that the system is no longer placed in the initial state.

If the inverse calculation unit 6 determines that the system is in the initial state, it reads the variable change code which is written in the stream buffer 2 to follow the initial state code. Then, using the initial variable which is set to the inverse calculation unit 6 in advance, the

inverse calculation unit 6 analyzes the variable change code to detect information representing the number of the selected variable within the variable set given from the variable creation unit 7. In response to the information, the inverse calculation unit 6 sets a variable which is used for the inverse calculation in this cycle in step C2.

Incidentally, the initial variable set to the inverse calculation unit 6 is identical to the initial variable set to the calculation unit 5.

Using the variable presently set, the inverse calculation unit 6 performs the inverse calculation on the calculated data stream output from the stream buffer 4 in step C3. In step C4, the inverse calculation unit 6 makes a decision as to whether the data stream presently captured from the stream buffer 2 contains the variable change code or not.

If the inverse calculation unit 6 determines that the data stream does not contain the variable change code, it performs the inverse calculation to reproduce the data stream, which is forwarded to the stream processing unit 3 in step C6.

In contrast, if the inverse calculation unit 6 determines that the data stream contains the variable change code, it captures the information representing the number of the selected variable within the variable set given from the variable creation unit 7. In response to the information, the inverse calculation unit 6 newly sets a variable which is used for inverse calculation in this cycle in step C5. Using the variable newly set, the inverse calculation unit 6 performs the inverse calculation again on the calculated data stream.

Incidentally, it is possible to employ any types of the (inverse)

calculations for the data streams. However, it is necessary to perform the (inverse) calculations with respect to each of prescribed units of data that the stream processing unit 3 is capable of dealing with at a time.

Because, if the (inverse) calculations are performed beyond a range of data that the stream processing unit 3 is capable of processing, there exists an "excessive" amount of data stream(s) that the stream processing unit 3 is incapable of accepting. In that case, such an excessive amount of data stream(s) should be temporarily stored on the stream buffer 2. That is, the calculations of the data streams may be meaningless.

Next, a description will be given with respect to a modified example of the data transmission system with reference to FIG. 5.

As compared with the aforementioned data transmission system of FIG. 1, the data transmission system of the modified example shown in FIG. 5 is characterized by that the variable creation unit 7 is provided inside of the calculation unit 5. Herein, a variable presently created by the variable creation unit 7 is subjected to calculation using a preceding variable together with the variable change code. Then, the calculated variable is written into the stream buffer 2 to follow the variable change code.

The modified example of the data transmission system does not need to provide the foregoing information representing the number of the variable selected within the variables created by the variable creation unit 7.

Next, when detecting the variable change code, the inverse calculation unit 6 is capable of capturing the variable used for the inverse calculation in the next cycle directly from the stream buffer 2. Therefore,

the modified example of FIG. 5 is capable of demonstrating the same effects of the foregoing data transmission system of FIG. 1.

It is necessary to share the variable used for both of the calculation and inverse calculation. In the modified example, such variable is created by the variable creation unit 7 and is delivered to both of the calculation unit 5 and the inverse calculation unit 6.

Incidentally, the modified example copes with the difference between the timings to perform the calculation and inverse calculation respectively, as follows:

The variable change code is inserted into the data stream(s) in conform with the "variable change" timing at the calculation unit 5. So, the inverse calculation unit 6 changes the variable thereof at the timing to detect the variable change code.

As described heretofore, this invention is designed such that the original data streams do not exist on the buffer memory. Thus, this invention is capable of inhibiting the third party (or someone) to easily capture the "original" data streams recorded on the recording medium from the buffer memory.

In addition, even if the third party succeeds to capture the data streams from the data transmission system of this invention, it is difficult for the third party to easily decode the "calculated" data streams stored on the buffer memory

As described heretofore, this invention is capable of offering a variety of effects, which can be summarized as follows:

(1) Even if the third party succeeds to capture the stored contents of the

intermediate buffer memory, it is difficult for the third party to analyze them. So, this invention is capable of inhibitting the third party to have a chance to easily capture the "original" data streams recorded on the recording medium. Thus, it is possible to prevent the third party from easily reproducing a duplicate recording the original data streams of the recording medium.

(2) Because, this invention is designed to store the "calculated (or coded" data streams on the intermediate buffer memory, it is not easy for the third party to capture the original data streams from the intermediate buffer memory. In addition, the calculations do not always use the same variable(s). In other words, the variables may be changed at random. Further, the variable creation unit creates a number of variables (i.e., variable set) every time the calculation is performed. Furthermore, the calculation in each cycle uses a certain variable which is chosen arbitrarily from the variable set. Thus, it is very difficult for the third party to specify the variable(s).

As this invention may be embodied in several forms without departing from the spirit of essential characteristics thereof, the present embodiment is therefore illustrative and not restrictive, since the scope of the invention is defined by the appended claims rather than by the description preceding them, and all changes that fall within metes and bounds of the claims, or equivalence of such metes and bounds are therefore intended to be embraced by the claims.

What is claimed is:

1. A data transmission system comprising:

calculation means for performing calculation using a variable on an original data stream read from a recording medium so as to produce a calculated data stream;

variable creation means for creating the variable;

a stream buffer for temporarily storing the calculated data stream therein;

inverse calculation means for performing inverse calculation on the calculated data stream output from the stream buffer to reproduce the data stream;

stream processing means for processing the reproduced data stream to produce a processed data stream; and

output means for outputting the processed data stream.

2. A data transmission system according to claim 1 wherein the data stream read from the recording medium corresponds to an amount of data which can be processed at a time.

3. A data transmission system according to claim 1 or 2 wherein the variable do not remain the same so that the variable is changed at an arbitrary timing.

4. A data transmission system according to any one of claims 1 to 3

wherein a variable change code representing a message that the variable is changed is produced by the calculation using the variable and is temporarily stored in the stream buffer together with the calculated data stream.

5. A data transmission system comprising:

calculation means for performing calculation using a variable on an original data stream read from a recording medium so as to produce a calculated data stream;

variable creation means for creating a number of variables, one of which is arbitrarily chosen as the variable used for the calculation;

a stream buffer for temporarily storing the calculated data stream therein;

inverse calculation means for performing inverse calculation on the calculated data streams output from the stream buffer to reproduce the data stream;

stream processing means for processing the reproduced data stream to produce a processed data stream; and

output means for outputting the processed data stream.

6. A data transmission system according to claim 5 wherein the data stream read from the recording medium corresponds to an amount of data which can be processed at a time.

7. A data transmission system according to 5 or 6 wherein a variable

change code representing a message that the variable is changed is produced by the calculation using the variable and is temporarily stored in the stream buffer together with the calculated data stream.

8. A data transmission system comprising:

variable creation means for creating a variable set consisting of a number of variables;

calculation means for receiving an original data stream read from a recording medium so as to perform calculation on the original data stream by use of a variable which is selected from the variable set given from the variable creation means, so that the calculation means produces a calculated data stream based on the original data stream as well as a variable change code representing the variable selected from the variable set;

a stream buffer for temporarily storing the calculated data stream together with the variable change code;

inverse calculation means for performing inverse calculation on the calculated data stream output from the stream buffer by use of the variable which is selected from the variable set in accordance with the variable change code, so that the inverse calculation means reproduces the data steam based on the calculated data stream;

stream processing means for processing the reproduced data stream so as to produce a processed data stream; and

output means for outputting the processed data stream.

9. A data transmission system according to claim 8 wherein the variable creation means creates the variable set in each cycle while the variable selected from the variable set is changed in each cycle of the calculation, so that the calculation and the inverse calculation are respectively performed using a same changed variable designated by the variable change code in each cycle.

ABSTRACT OF THE DISCLOSURE

A data transmission system is provided to transmit data streams recorded on recording media to the external system or device. Herein, an original data stream read from a recording medium is subjected to calculation using a variable selected from a variable set which consists of a number of variables and which is created by each cycle. A variable change code is provided to represent the variable selected from the variable set. Then, a calculated data stream is temporarily stored on a stream buffer together with the variable change code. The calculated data stream is output from the stream buffer and is subjected to inverse calculation using the same variable designated by the variable change code. Using the inverse calculation, it is possible to reproduce the data stream, which is then processed. Thereafter, the data transmission system outputs the processed data stream. Because the calculated data stream is stored on the stream buffer, it is difficult for the third party to easily capture the original data stream from the stream buffer. In addition, the variable used for the calculation and inverse calculation is changed in each cycle, so that it is difficult for the third party to decode the calculated data stream to the original data stream. Therefore, it is possible to prevent the third party to easily produce an unauthorized copy of the data streams recorded on the recording medium from the stored content of the stream buffer.

FIG.1

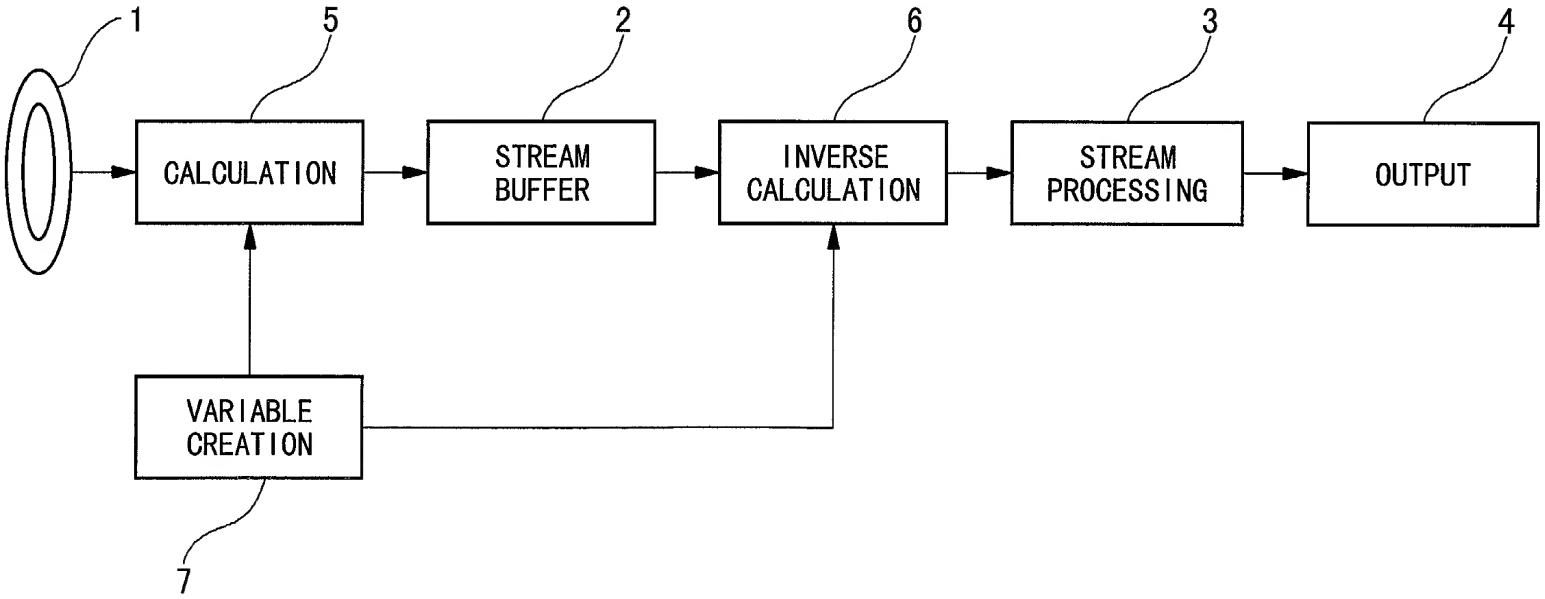
1
5
2
6
3
4
CALCULATION
STREAM BUFFER
INVERSE CALCULATION
STREAM PROCESSING
OUTPUT
VARIABLE CREATION
7

FIG.2

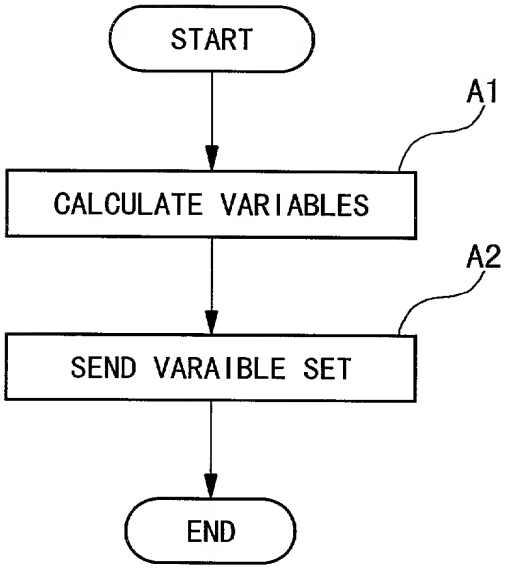

FIG.3

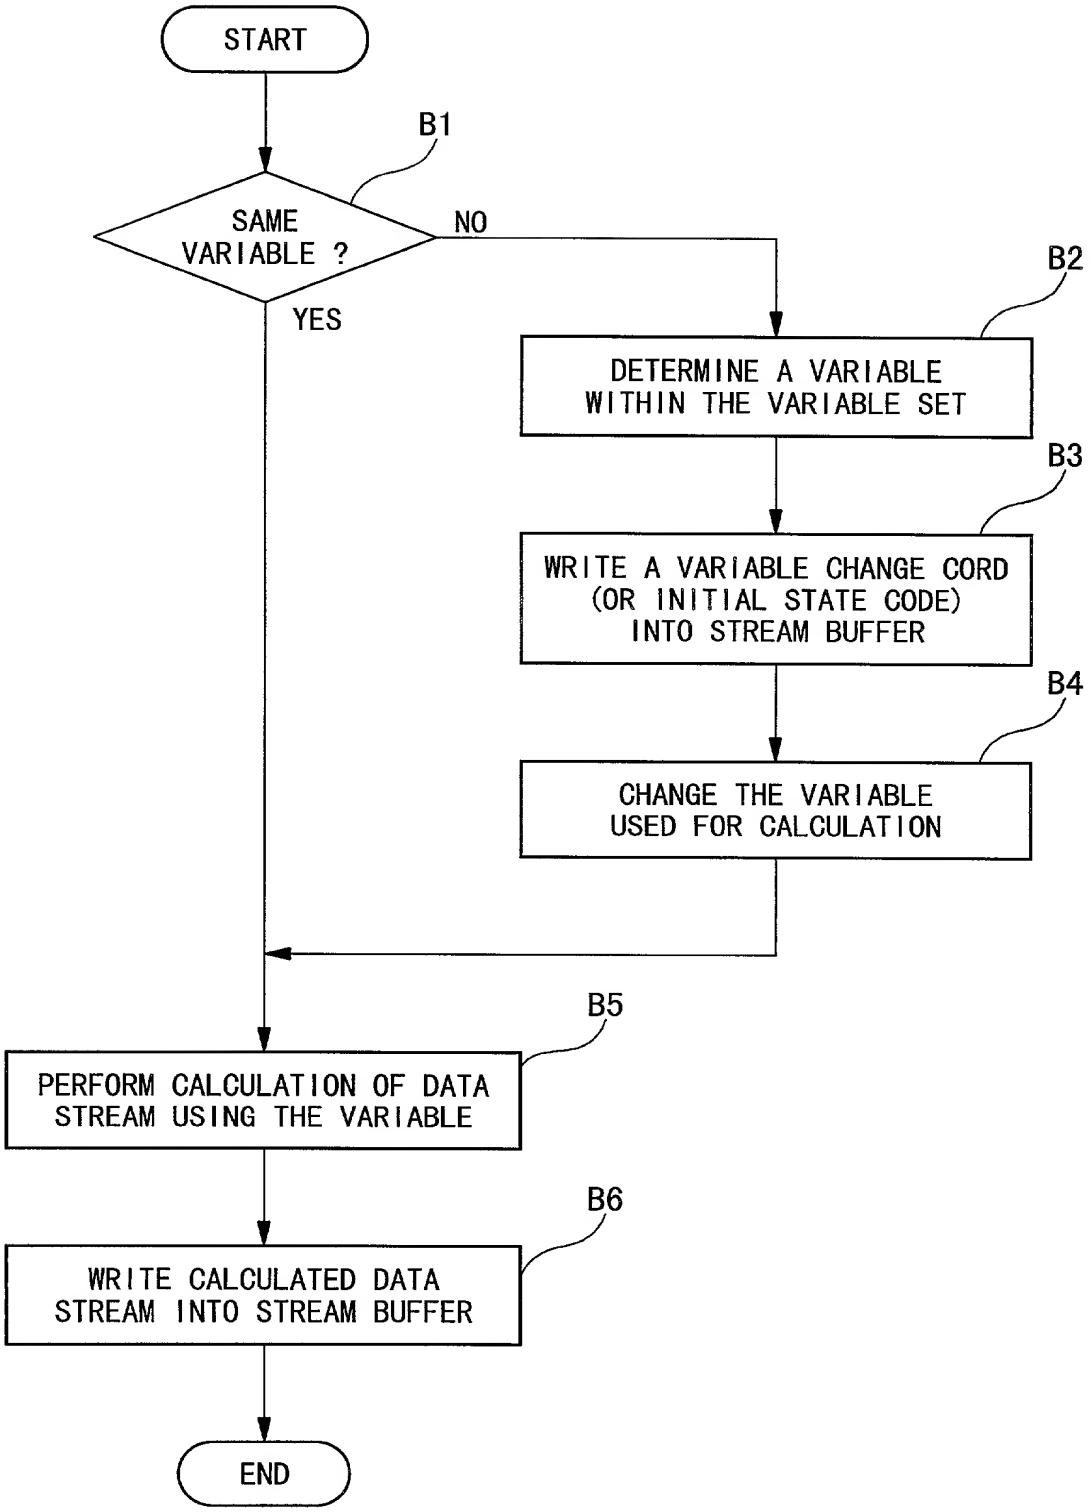
START
B1
SAME VARIABLE ?
NO
YES
B2
DETERMINE A VARIABLE WITHIN THE VARIABLE SET
B3
WRITE A VARIABLE CHANGE CORD (OR INITIAL STATE CODE) INTO STREAM BUFFER
B4
CHANGE THE VARIABLE USED FOR CALCULATION
B5
PERFORM CALCULATION OF DATA STREAM USING THE VARIABLE
B6
WRITE CALCULATED DATA STREAM INTO STREAM BUFFER
END

FIG.4

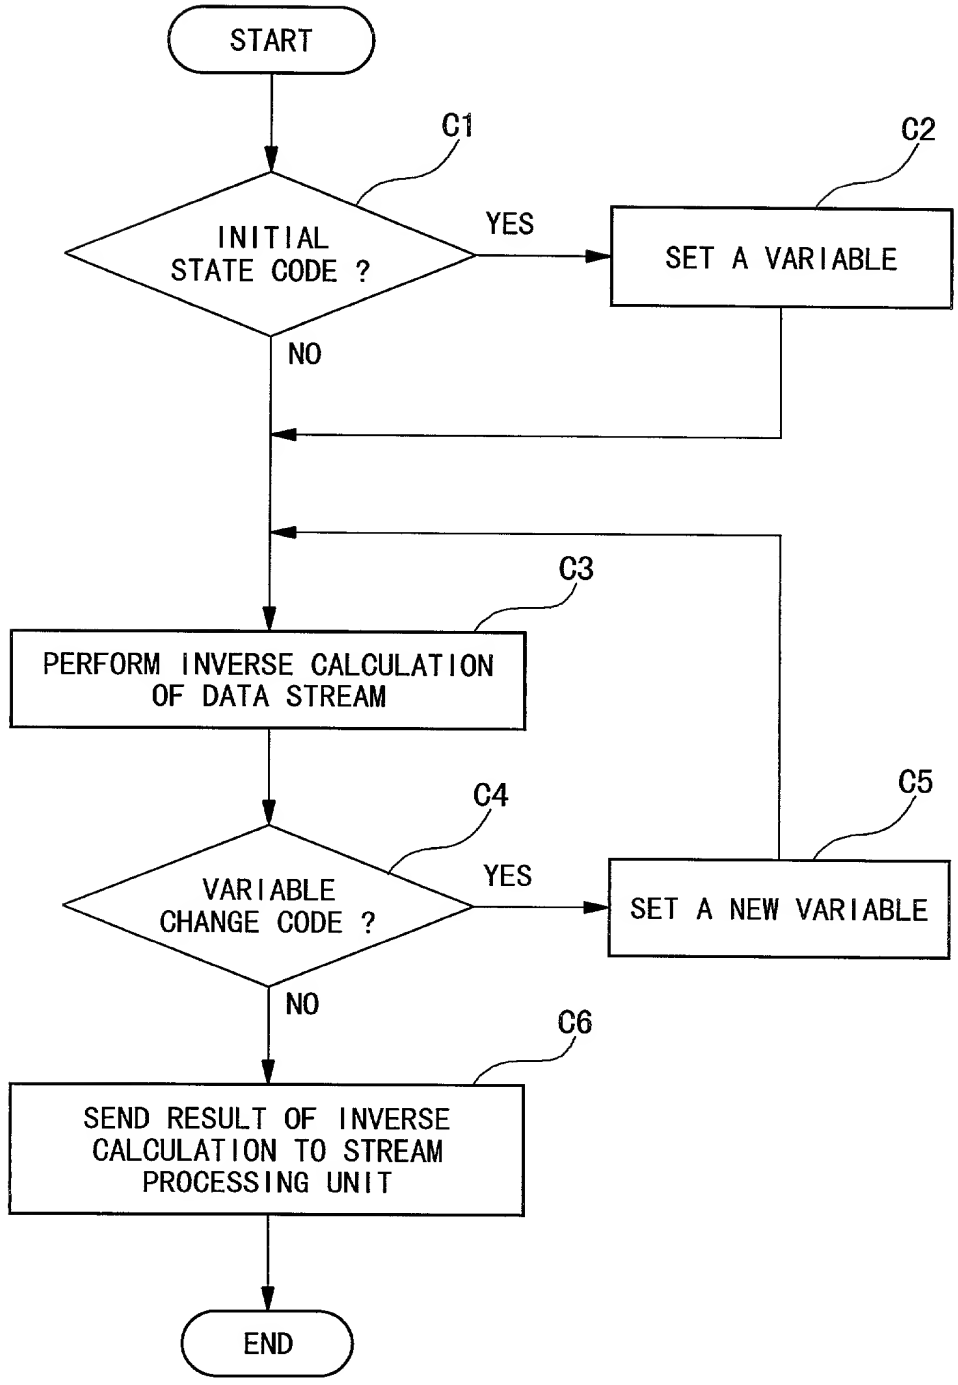
START
C1
INITIAL STATE CODE ?
YES
C2
SET A VARIABLE
NO
C3
PERFORM INVERSE CALCULATION OF DATA STREAM
C4
VARIABLE CHANGE CODE ?
YES
C5
SET A NEW VARIABLE
NO
C6
SEND RESULT OF INVERSE CALCULATION TO STREAM PROCESSING UNIT
END

FIG.5

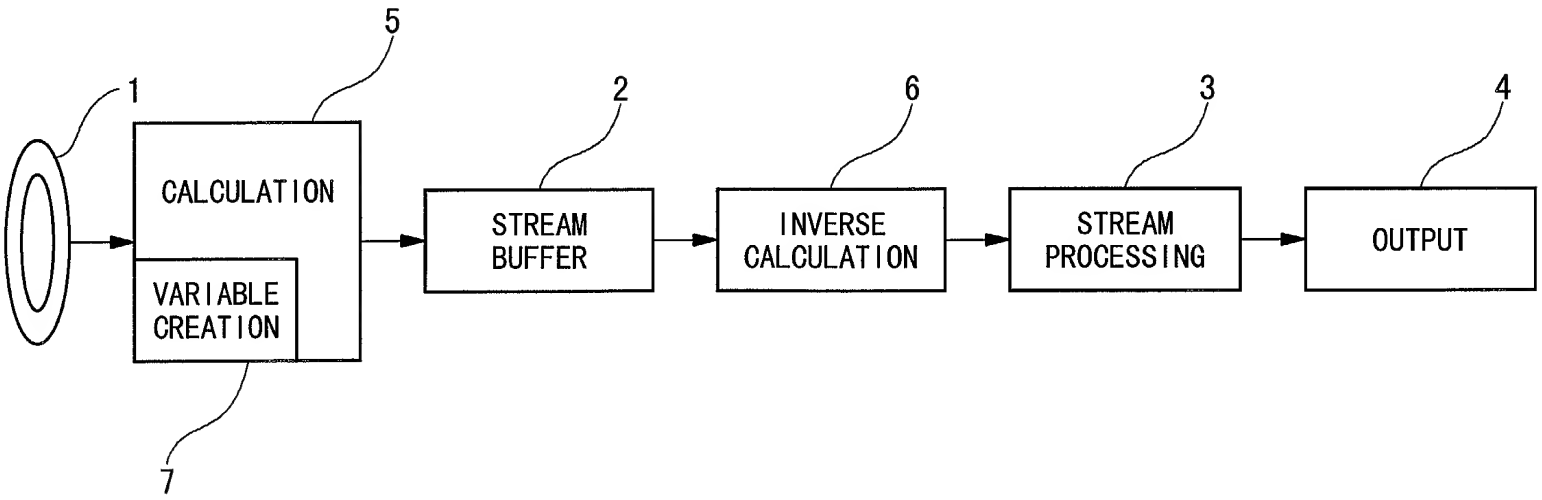
1
5
CALCULATION
VARIABLE CREATION
7
2
STREAM BUFFER
6
INVERSE CALCULATION
3
STREAM PROCESSING
4
OUTPUT

FIG.6

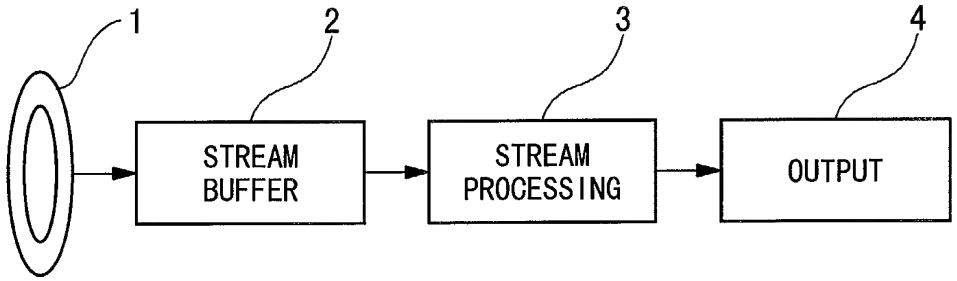

UNITED STATES OF AMERICA
COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

OFGS FILE NO. P/2850-19

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DATA TRANSMISSION SYSTEM FOR PREVENTION OF UNAUTHORIZED COPY OF DATA FROM RECORDING MEDIUM

the specification of which is attached hereto, unless the following box is checked:

☐ was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign or Provisional Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING *(day, month, year)*	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	Patent 10-127907	11,05,1998	YES XX NO ____
			YES ____ NO ____
			YES ____ NO ____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

UNITED STATES APPLICATION NUMBER	DATE OF FILING *(day, month, year)*	STATUS *(patented, pending, abandoned)*

I hereby appoint OSTROLENK, FABER, GERB & SOFFEN, LLP and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO: OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 AVENUE OF THE AMERICAS
NEW YORK, NEW YORK 10036-8403

DIRECT TELEPHONE CALLS TO:
(212) 382-0700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	INVENTOR'S SIGNATURE	DATE
Satoshi Hasegawa	Satoshi Hasegawa	April 21, 1999

RESIDENCE *(City and either State or Foreign Country)*	COUNTRY OF CITIZENSHIP
Tokyo, Japan	Japan

POST OFFICE ADDRESS
c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan

FULL NAME OF SECOND JOINT INVENTOR (IF ANY)	INVENTOR'S SIGNATURE	DATE

RESIDENCE *(City and either State or Foreign Country)*	COUNTRY OF CITIZENSHIP

POST OFFICE ADDRESS

FULL NAME OF THIRD JOINT INVENTOR (IF ANY)	INVENTOR'S SIGNATURE	DATE

RESIDENCE *(City and either State or Foreign Country)*	COUNTRY OF CITIZENSHIP

POST OFFICE ADDRESS

☐ CONTINUED ON PAGE 2